


User's Manual

U300III

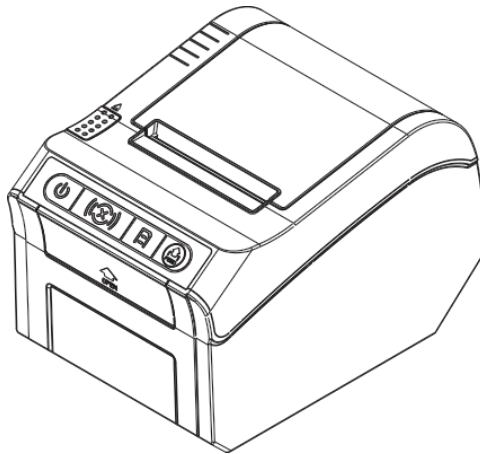

Proficient in Commercial POS Receipt Printers

1.Safety Notice:

- * Don't touch the printer head with anything.
- * Don't touch the cutter blade.
- * Don't bend the power cord excessively or place any heavy objects onto it.
- * Don't use the printer when it is out of order. This can cause a fire or and electrocution.
- * When connecting or disconnecting the plug, always hold the plug but not the cord.
- * Keep the desiccant out of children's reach.
- * Use only approved accessories and do not try to disassemble, repair or remodel it by yourself.
- * Install the printer on the stable surface. Choose firm, level surface where avoid vibration.
- * Don't let water or other foreign objects into the printer.
- * Don't connect a telephone line into the peripheral drive connector.
- * We recommend that you unplug the printer from the power outlet if no use it for a long period.

2. Applications:

- * POS system Receipts
- * EFT POS system Receipts
- * Gym, post, hospital, civil aviation system Receipts
- * Inquiry, Service system Receipts
- * Instrument test Receipts
- * Tax, Tab Receipts

3. Unpacking

After unpacking the unit, check that all the necessary accessories are included in the package.

User's Manual 1 PCS


Printer 1 PCS

Data Cable 1 PCS

Power Adapter (include power cord) 1 SET

4. Features

- * 200-250mm/sec high-speed printing
- * Support Kitchen Printing and Ethernet Printing
- * High print quality
- * Low working noise
- * Support cashdrawer kick-out
- * Easy maintenance
- * Various interface available (Serial + USB + Ethernet)
- * Built-in data buffer
- * Support character enlargement, bold, underline, line spacing and character spacing
- * Support NV images download
- * Low energy consumption and low operation cost
- * Compatible with ESC/POS command set
- * Character per line and character settings
- * Support Ethernet Printing status monitor, multiple connection printing and OPOS printing
- * Support printer identification, software binding and high-speed driver mode
- * Support various character sets (include GB18030)
- * Support paper end detection



Streamlined structure design



High-speed Printing



Printer Identification



Multiple Connection Printing



OPOS Driver




Various Character Sets

5.Specifications

Model	U300III
Print method	Direct thermal printing
Print density	576dot/line or 512dot/line
Print speed	300mm/sec
Print width	72mm
Paper thickness	0.06~0.08mm
Paper diameter	83mm
Print interface	Serial + USB + Ethernet
Barcode type	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/ CODE39/ITF/CODEBAR/CODE93/CODE128 / QRCODE
Buffer	Data: 128K bytes, NV Flash: 256K bytes
Font type	Simplified Chinese GB18030 / Traditional Chinese Big5 / International fonts
Font size	ANK Character: Font A: 12x12dot, Font B: 9x17dot; Chinese: 24x24dot
Print command	ESC/POS compatible
Power supply	AC 110V/220V, 50~60Hz
Power adapter	DC 24V/2.5A
Cash drawer	DC 24V/1A
Work environment	Temperature: 5~45℃, Humidity: 10~80%
Storage environment	Temperature: -10~50℃, Humidity: 10~90%
Dimension	136×190×130 mm(W×D×H)


6. Printer Connection

- a. Plug the DC cord connector into the printer's power connector.
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

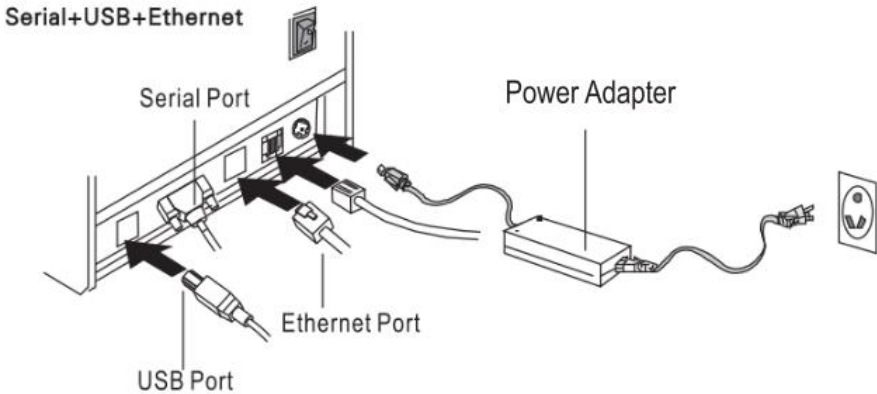


7. Installing the roll paper

- a. Open the printer cover.
- b. Install the roller in the roll paper, and put them into the printer.
- c. Pull out some paper outside the printer and then close the printer cover.
- d. Close the top cover. Press the printer cover to avoid error position of roll paper.

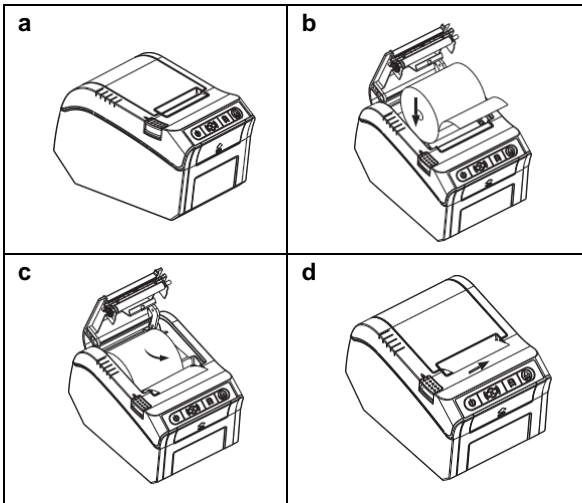


8. Setting the Printing Mode (DIP switches)

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.

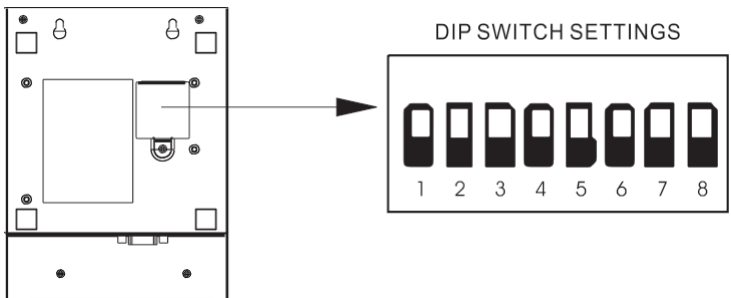

9. Buttons and Indicators

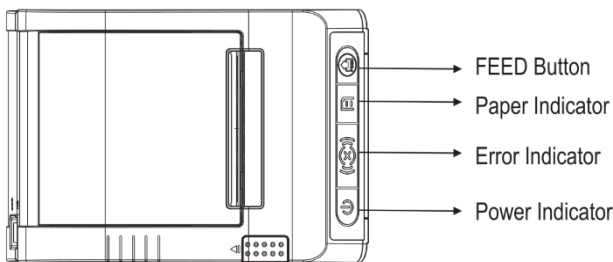

10. Functions of buttons and indicators

(1) . FEED Button

Press to feed paper manually.

(2) . PAPER Indicator

When this indicator is lighting as well as the ERROR indicator, printer is out of paper.

When this indicator is dim as well as the ERROR indicator, printer has paper.

When this indicator is lighting but the ERROR indicator is dim, roll paper is near end.

(3) . POWER Indicator

When this indicator lights, the printer is turned on.

When this indicator dims, the printer is turned off.

(4) . ERROR Indicator

When printer is in the status of paper out, cutter error or print head overheat, this indicator is flashing according to user's defined setting.

11. Cutter Maintenance


Step (1)

a. Turn off then on the printer, the printer will initialize and reset the cutter.


Step (2)

a. Open the front cover.

b. Wheel the gear on the cutter to make the cutter back to initial position. Open the printer cover and install roll paper correctly, then the printer works normally.

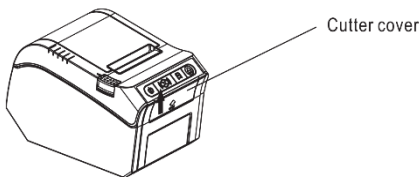


1. Open the cover by the arrow direction

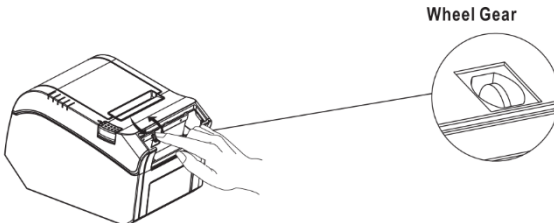

2. Turn the gear to reset the cutter

12. Printer view

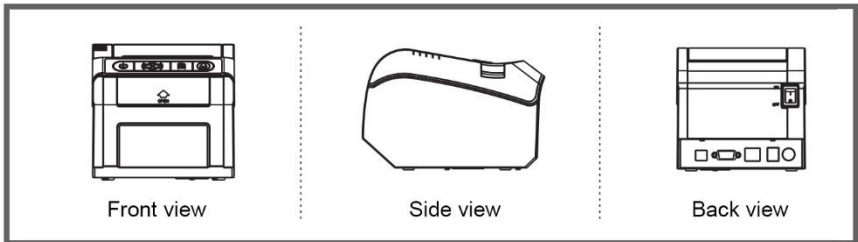


13. Driver Setup

- a. Insert the driver CD disk, run the GA-Printer Driver v1.1 to set up, click Next.




- b. Select the operation system that you're using

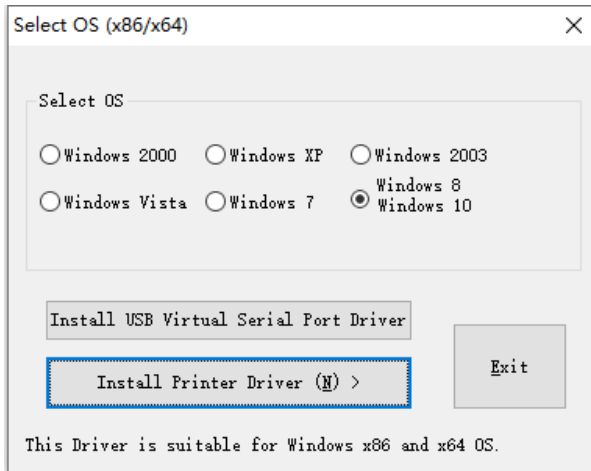


A dialog box titled "Select OS (x86/x64)" with a close button in the top right corner. It contains a "Select OS" section with six radio button options: "Windows 2000", "Windows XP", "Windows 2003", "Windows Vista", "Windows 7", and "Windows 10". The "Windows 10" option is selected. Below this section are three buttons: "Install USB Virtual Serial Port Driver", "Install Printer Driver (N) >" (which is highlighted with a blue dashed border), and "Exit". At the bottom, a text line states: "This Driver is suitable for Windows x86 and x64 OS."

- c. Select the driver U3 Series and click next

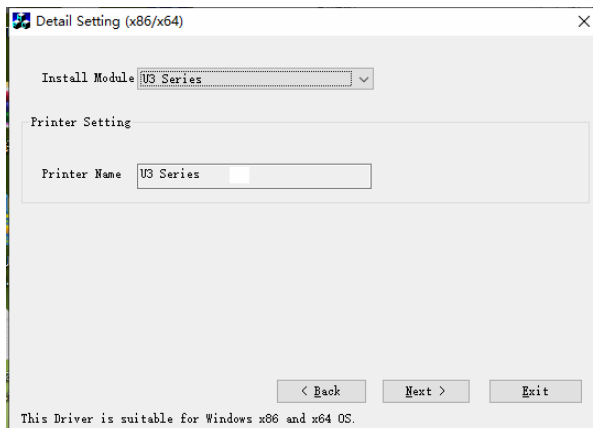

A dialog box titled "Detail Setting (x86/x64)" with a close button in the top right corner. It features an "Install Module" dropdown menu currently set to "U3 Series". Below this is a "Printer Setting" section with a "Printer Name" text field containing "U3 Series". At the bottom, there are three buttons: "< Back", "Next >", and "Exit". A text line at the very bottom reads: "This Driver is suitable for Windows x86 and x64 OS."

d. Select the corresponding printer port.

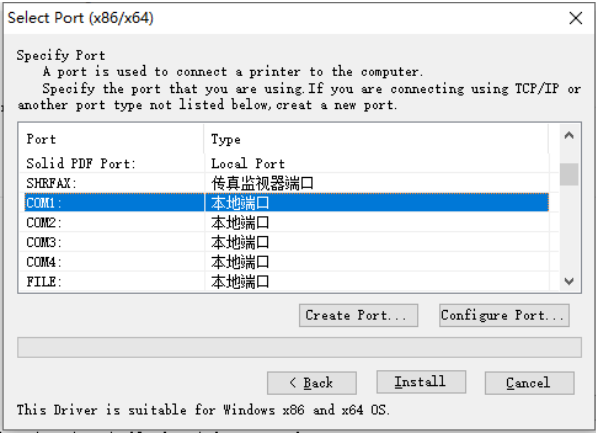

e. Complete the setup.

